


# Ion Control

www.victronenergy.com



**Main screen**



**History screen**



**Diagnostics screen**



**Lynx Ion Status screen**



**Back side**

## Ion Control

The Ion Control shows all vital data from the Lithium Battery system:

- Battery voltage (V).
- Battery charge/discharge current (A).
- Ampere-hours consumed (Ah).
- State of charge (%).
- Time to go at the current rate of discharge until the battery has reached 90% discharge.
- Visual alarm: almost charged, almost discharged

## Historic data

It will also show the following historic values:

- The depth of the deepest discharge.
- The number of full discharges
- The cumulative number of Amp hours drawn from the battery
- The minimum battery voltage recorded
- The maximum battery voltage recorded


The historic values are stored in non-volatile memory in the Lynx Shunt in the system.

## Using multiple Ion Controls

Multiple Ion Controls can be installed to monitor a single Lithium Battery System. All Ion Controls will display the same data. It is recommended, when more than one Ion Control is installed, to use an external network power source due to the limited capacity of the Lynx Shunt's power supply.

Note that per system only one Lynx Ion module can be installed.

ELECTRICAL	
Power supply voltage range	10 – 32 VDC (No need for an external power supply. Power is supplied on the VE.Can RJ network by the Lynx Shunt)
Power consumption	130mA at 12VDC
Audible Alarm	4kHz Internal sounder
Connections	Integral Deutsch 12 way connector (DT04-12PA)
Cabling supplied	1m Deutsch 12 way to Victron RJ45 Canbus connection
Communications	NMEA2000 (expects battery instance 0)
ENVIRONMENTAL	
Operating temperature	-25 to +75°C
Degree of Protection	IP67
Salt Spray	IEC 60068-2-52: 1996
EMC	IEC 61000 and EN55022
ENCLOSURE	
Material & Colour	Anthracite Grey ABS housing and acrylic lens
Dimensions	110mm x 110mm x 38.5mm deep (without connector)
Depth front mounted	21.5mm forward protrusion, 17mm rear protrusion (without connector)
Panel cut out	64mm diameter hole with 4 mount holes, 4.3mm dia.
Weight	265 grams

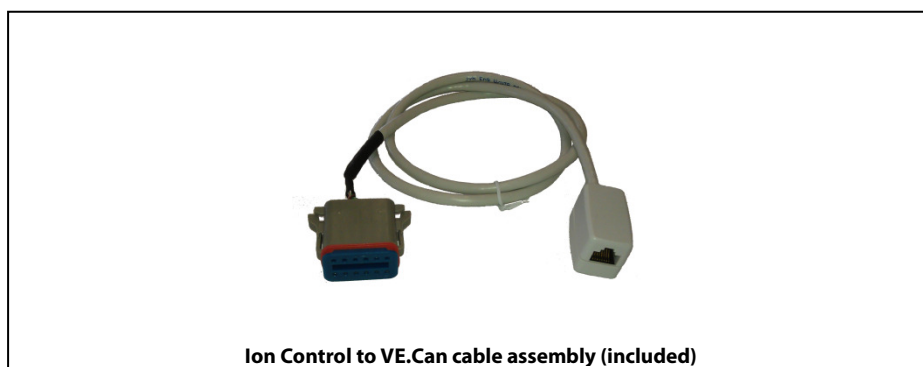


**Ion Control to VE.Can cable assembly (included)**

# Ion Control

www.victronenergy.com

## Modes of operation

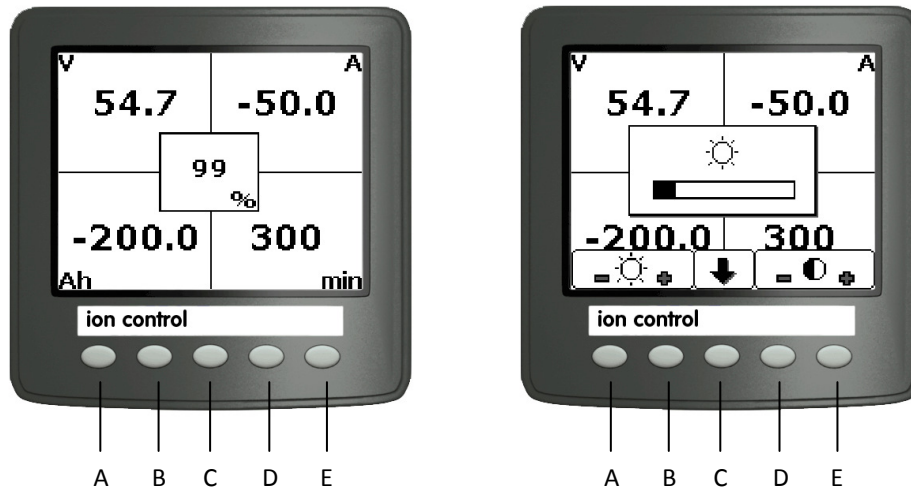

### Browsing


To browse through the screens the keys [D] and [B] are used. Press [D] to continue to the next screen and press [B] to go to the previous screen.

### Lighting and contrast

To enter this menu press [C], a popup window will appear. Use [A] and [B] to alter the intensity of the backlight. The LCD contrast can be changed using [D] and [E].

Pressing [C] will store the settings and exit the menu.

### System diagram

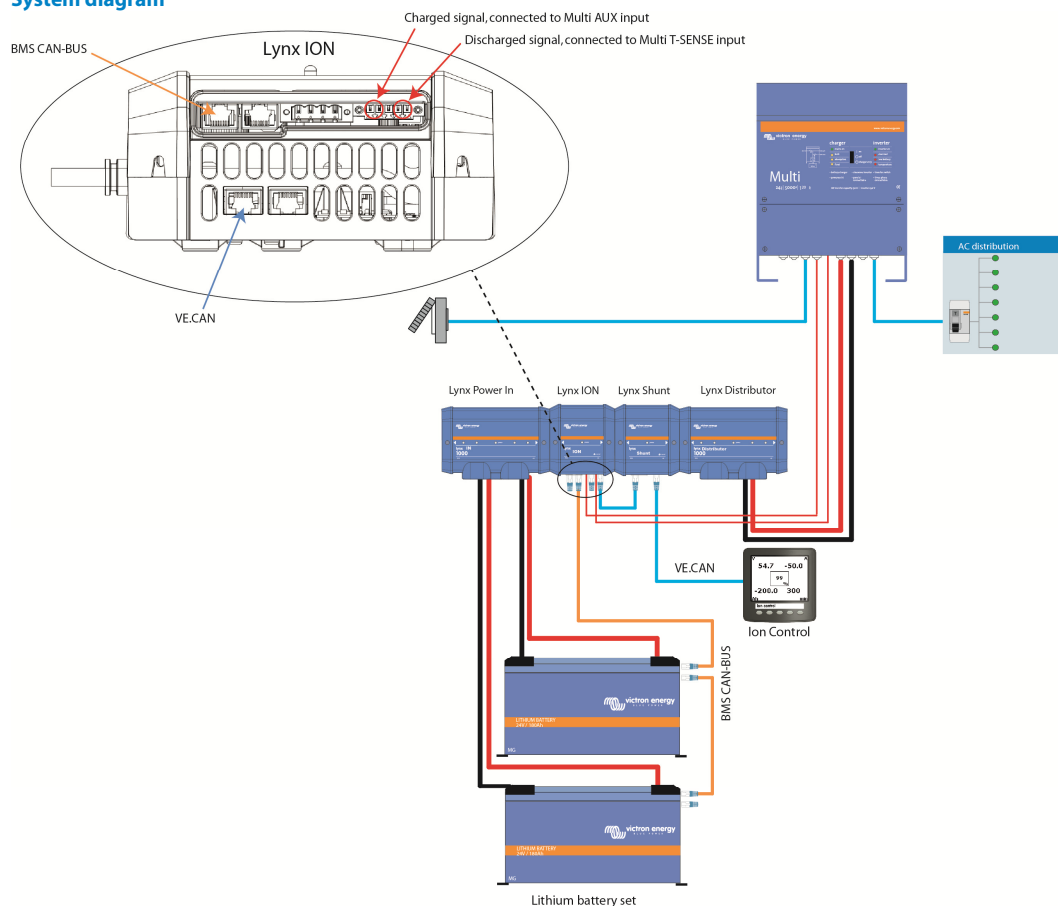

# Ion Control

[www.victronenergy.com](http://www.victronenergy.com)

